


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	11/7/2016	DPD	JAG

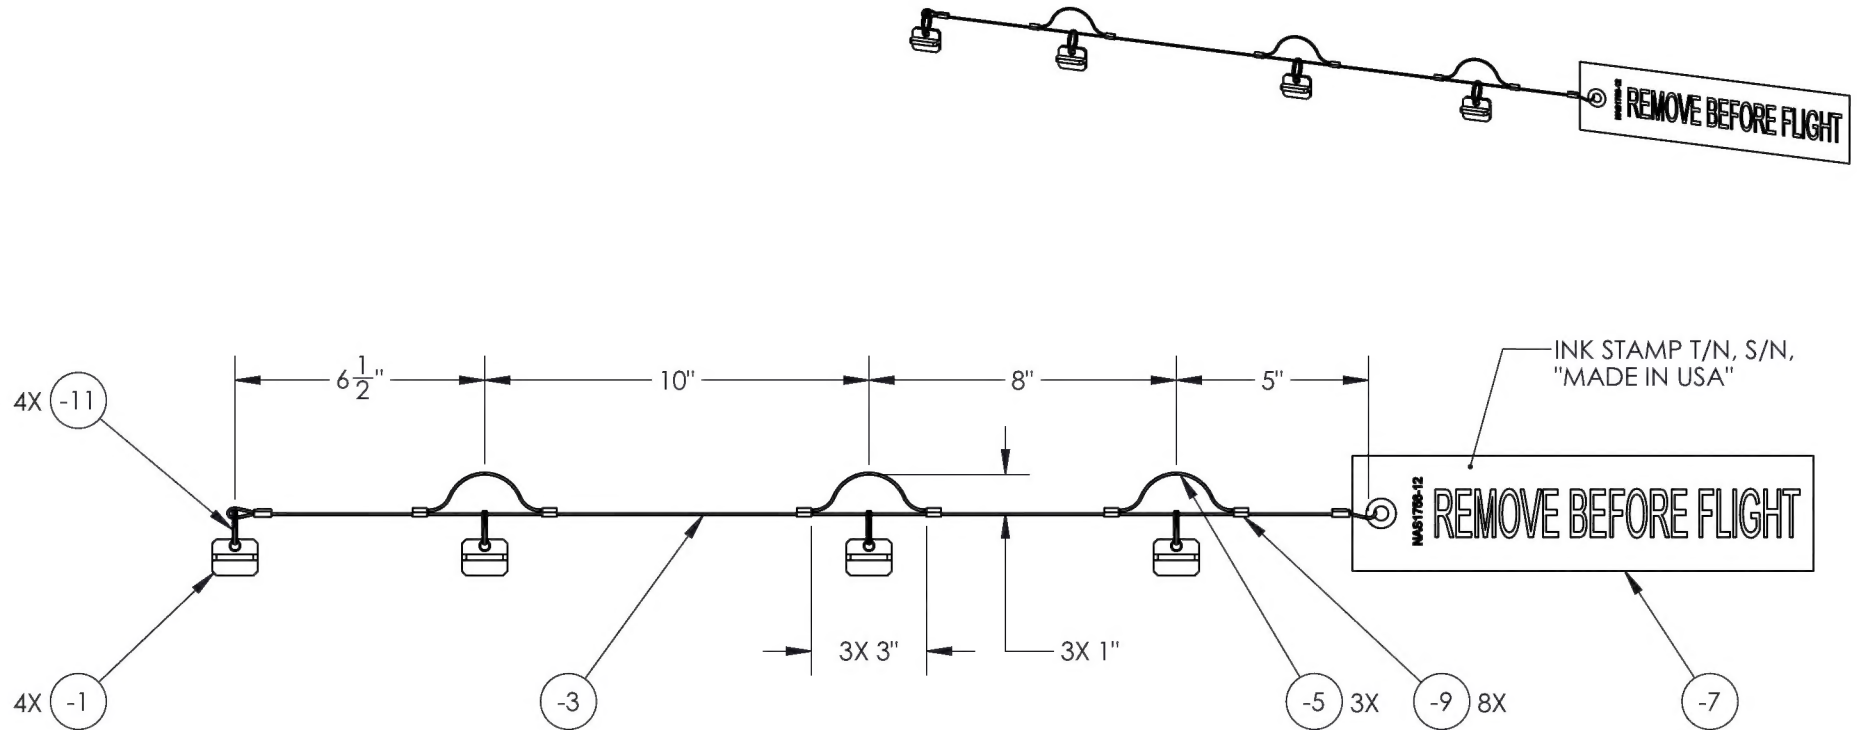




- NOTES:
 1. REF. AIRBUS T/N: M670V4003134.
 2. PART OF KIT RBEM670V4003101.

DART AEROSPACE	
TITLE MRB UP STOP SHIM	
DWG NO. RBEM670V4003134	REV 1
MAT'L REAT TREAT FINISH SPEC	
DRAWN BY: DUERFELDT CHECKED: CLOUGH OPPTS APPR: ANDERSON QA APPR: LINDSAY APPROVED: GILBERT	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 SURFACES = 125° 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
USED ON MODEL H175	
SCALE 1:5	DATE 5/20/2016
SHEET 1 OF 2	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	4	SHIM	6061		2
		B/O	-3	1	LANYARD	COATED STEEL	Ø1/16 (CARR LANE #CL-2-C)	1
		B/O	-5	3	SHORT LANYARD	COATED STEEL	Ø1/16 (CARR LANE #CL-2-C)	1
		B/O	-7	1	REMOVE BEFORE FLIGHT	NYLON	NAS 1756-12	1
		B/O	-9	8	FERRULE	ALUMINUM	Ø1/16 X 3/8 (MCMaster-CARR #3896T31)	1
		B/O	-11	4	SPLIT RING	STEEL	Ø.80 I.D. X Ø.07 WIRE (MCMaster-CARR #86805T36)	1

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

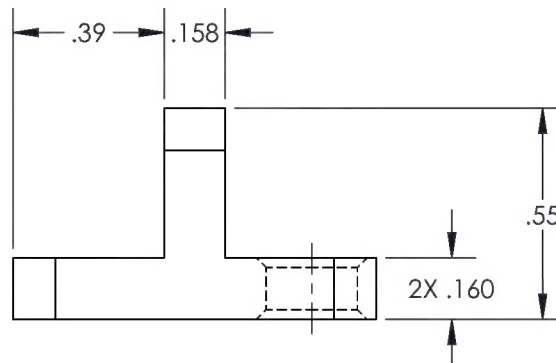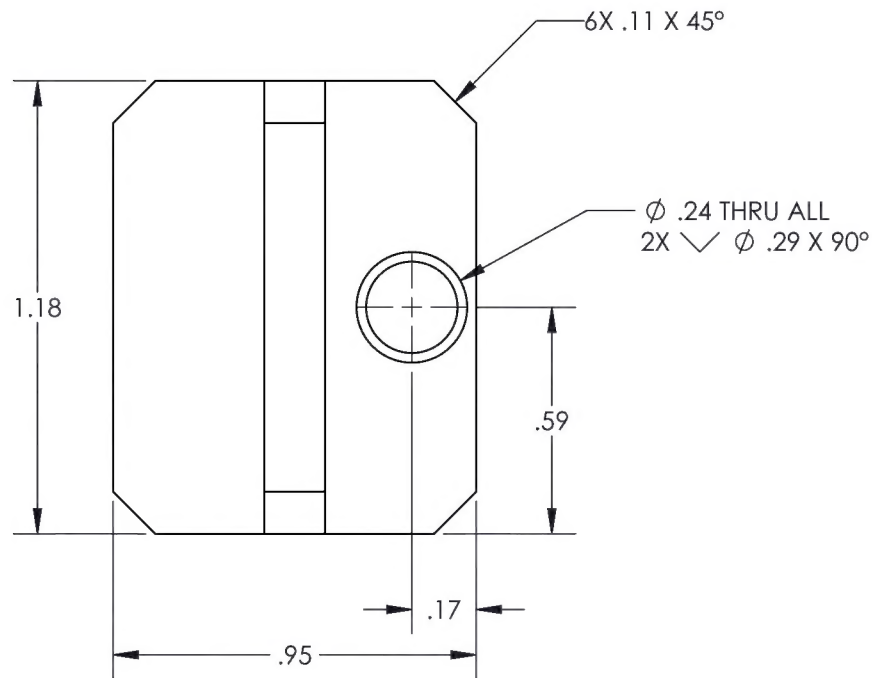

(-1)

SHIM

DART AEROSPACE	
TITLE MRB UP STOP SHIM	
DWG NO. RBEM670V4003134-1	REV 1
MAT'L 6061	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH CLEAR ANODIZE	.XXX ± .005 FRACTIONS ± 1/8
SPEC MIL-A-8625F, TYPE II, CLASS I	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
SCALE 2:1	DATE 5/20/2016
	SHEET 2 OF 2